

Parameter	Reportable Range	Resolution	Measurement method	
pH (pH units)	6.5 – 8.0	0.001	Potentiometric sensor	
pO2 (mmHg)	10 – 700	0.1	Amperometric sensor	
pCO ₂ (mmHg)	10 – 150	0.1	Potentiometric sensor	
Na (mmol/L)	100 – 180	0.1	Potentiometric sensor	
K (mmol/L)	2.0 – 9.0	0.01	Potentiometric sensor	
Ca (mmol/L)	0.25 – 2.5	0.01	Potentiometric sensor	
CI (mmol/L)	65 – 140	0.1	Potentiometric sensor	
Glu (mg/dL or mmol/L)	20 - 700/1.1 - 38.9	1/0.1	Amperometric sensor	
Lac (mg/dL or mmol/L)	2.7 – 180.2/0.3 -20	0.1/0.01	Amperometric sensor	
Hct (%PCV or Fraction)	10 – 75 /0.10 – 0.75	1%/0.01	Conductance sensor	

Specification

Throughput	Results in 1 minute after sample aspiration			
Sample volume	140µl			
Quality control	3 or 5 levels QC, External electronic simulator			
Display	7-inch color LCD Display, 800*480			
Interface	4 x USB 2.0 host, 1 x RS232, WLAN			
Input device	Touch screen and barcode scanner			
Power supply	100~240VAC, 50/60Hz			
Battery	5000mAh rechargeable lithium-ion battery, 50 samples continuous testing			
Dimensions (W*H*D)	238*153*310 mm			
Weight	3.65 KG			
Operation Environment	10 °C-31 °C; %RH: 25%-80%; 70 -106.6 KPa			

About Edan

Edan is a healthcare company dedicated to improving the human condition around the world by delivering value-driven, innovative and high-quality medical products and services. For over 20 years, Edan has been pioneering a comprehensive line of medical solutions that address a broad range of healthcare practices including:

- Diagnostic ECG
- Ultrasound Imaging
- In-Vitro Diagnostics

- Patient Monitoring
- Point-of-Care Testing
- Veterinary

• OB/GYN

Healthcare professionals around the world depend on Edan's breakthrough medical technologies and outstanding customer support.



Global Headquarter:

Edan Instruments, Inc. | No.15 Jinhui Rd., Jinsha Community, Kengzi Subdistrict, Pingshan District, Shenzhen | 518122 P.R. China +86.755.26898326 | www.edan.com | info@edan.com.cn

U.S. and Canada inquiries:

EDAN Diagnostics, Inc. | 9918 Via Pasar, San Diego, CA 92126

+1.858.750.3066 | www.edandiagnostics.com | edan-info@edandiagnostics.com

 $C \in$

ENG-POCT-i15-V2.8-20190924

© 2019 Edan Instruments, Inc. All rights reserved. Features and specifications are subject to change without prior notice. No reproduction, copy or transmission may be made without written permission. Not all products or features are available in all countries, contact Edan for local availability.

Blood Gas and Chemistry Analyzer









Portable, lightweight

- Capable to run 50 samples with fully-charged battery
- · Diagnose at the point of care, patient side, out in the field or exam room

Easy, Quick and Convenient

- Zero maintenance
- Minimize hands on time and training requirement
- Auto-sampling
- Report is ready within one minute after sample aspiration


Accurate and Reliable

- · Innovative microchip liquid control technology and micro-sensor multifunction membrane technology
- High sensitivity and accuracyCalibrator, Control and Electronic simulator to TRIPLE guarantee the RESULTS!

- Flexible Data Management
 Acquire patients' information via barcode/QR code
- Up to 10,000 patient data storage
- 4 USB ports and LAN/WiFi for data management
- Optional data management software

Multi-parameter cartridge

- · Multi popular time-sensitive parameters come in one cartridge, including ABG, electrolytes and metabolites
- Single-use cartridge avoids contamination
- Room temperature storage with long shelf-life

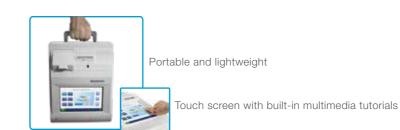



i15 Quality Control System

Triple Guarantee the Result



Variety of test Cartridges

i15 Video

	рН	pCO ₂	pO ₂	Na	K	Cl	Ca	Hct	Glu	Lac
BG3										
BG8		_			_			_		
BG4										
BG9										
BG10										
BC4										

Calculated values: cH+, HCO3-act, HCO3-std, BE(ecf), BE(B), BB(B), ctCO2, sO2(est), Ca++(7.4), AnGap, tHb(est), pO2(A-a), pO2(a/A), RI, pO2/FIO2, cH+(T), pH(T), pCO2(T), pO2(T), pO2(A-a)(T), pO2(a/A)(T), RI(T), pO2(T)/FIO2, mOsm